




# CMP9620

## Wi-Fi + BLE

### Connectivity for IoT

2x2 MU-MIMO with concurrent Wi-Fi 6 & Bluetooth V5.3

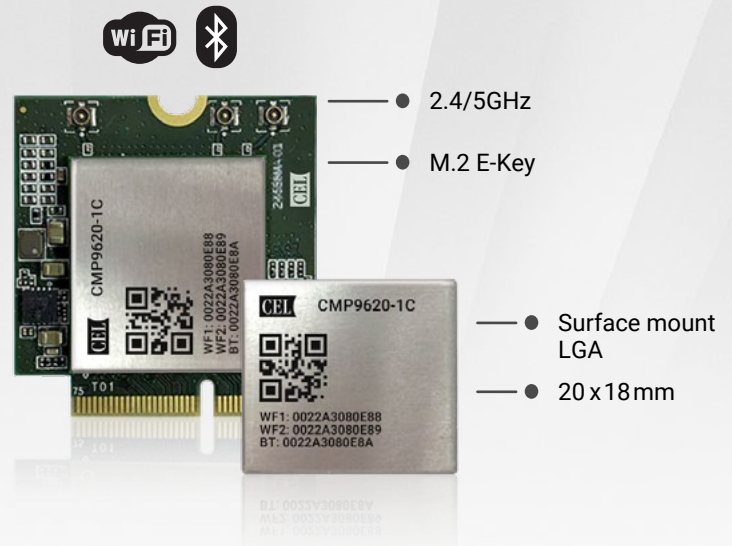

New wireless deployments demand more data throughput and more efficient network utilization. CEL designed the CMP9620 to deliver both, While offering out-of-the-box integration into NXP's I.MX8 ecosystem. Simultaneous Dual-Band operation, combined with concurrent Bluetooth and the latest Bluetooth features, deliver the connectivity demanded by Edge Gateways, HUBS and other High-Banwidth applications.

#### WIRELESS FEATURES

- Dual-Band 2x2 Wi-Fi 6 (802.11 ax)
  - 1.2 Gbps PHY Rate @ 5 GHz
  - 458 Mbps PHY Rate @ 2.4 GHz
  - Concurrent Dual Band 2x2 MU-MIMO
  - TX: 18 dBm
  - PCIe Host Interface
- Dual-Mode Bluetooth v5.3
  - Tx: tbd dBm
  - 3 Mbps / 2 Mbps / 1 Mbps PHY
  - Coded PHY
  - Bluetooth Mesh
  - AoA / AoD
  - Advertising Extensions
- LTE Co-Existence
- Low Power Consumption
- Long Range & Broad Coverage

#### ANTENNA OPTIONS

- 3X Integrated MFH4 Connectors
  - 2X WLAN
  - 1X Bluetooth

#### OTHER

- Certifications: FCC/IC/CE
- M.2 E-Key, Surface-mount LGA
- 28 x 30 mm, 20 x 18mm
- -40 C to +85 C Operation

#### HOST DRIVER SOURCE CODE

- Linux/Android for I.MX8
- Hardware Porting Guides
- CEL Software Repository

#### APPLICATIONS

- Edge Gateways
- Industrial and Building Automation
- Retail/POS Terminals
- Smart City
- Smart Home/Gateways
- IP Cameras
- Connected Healthcare
- Rugged Computing
- Medical Equipment

Questions? Call Us  
**(408) 919-2500**

[www.cel.com](http://www.cel.com)