

DATA SHEET : CG2415X3

0.5 to 6.0 GHz High Power SPDT Switch

Features


- Control voltage:
 $VC(H) = 1.8 \text{ to } 5.3 \text{ V (3.0V TYP.)}$
 $VC(L) = -0.2 \text{ to } 0.2 \text{ V (0V TYP.)}$
- Low insertion loss:
 $L_{ins1} = 0.30 \text{ dB TYP. @ } f = 0.5 \text{ to } 2.0 \text{ GHz}$
 $L_{ins2} = 0.35 \text{ dB TYP. @ } f = 2.0 \text{ to } 2.5 \text{ GHz}$
 $L_{ins3} = 0.40 \text{ dB TYP. @ } f = 2.5 \text{ to } 3.8 \text{ GHz}$
 $L_{ins4} = 0.45 \text{ dB TYP. @ } f = 3.8 \text{ to } 6.0 \text{ GHz}$
- High isolation:
 $ISL1 = 32 \text{ dB TYP. @ } f = 0.5 \text{ to } 2.0 \text{ GHz}$
 $ISL2 = 32 \text{ dB TYP. @ } f = 2.0 \text{ to } 2.5 \text{ GHz}$
 $ISL3 = 32 \text{ dB TYP. @ } f = 2.5 \text{ to } 3.8 \text{ GHz}$
 $ISL4 = 26 \text{ dB TYP. @ } f = 3.8 \text{ to } 6.0 \text{ GHz}$
- Handling power:
 $P_{in(0.5dB)} = +34 \text{ dBm TYP.}$
@ $VC(H) = 3.0 \text{ V, } VC(L) = 0 \text{ V}$

Package

- 6-pin Thin SON Package (X3)
(1.5mm x 1.5mm x 0.37mm)

Description


- The CG2415X3 is a GaAs MMIC SPDT (Single Pole Double Throw) switch which was developed for WiMAX and wireless LAN



Applications

- WiMAX and wireless LAN
(IEEE802.11a/b/g/n/ac), etc.

Pin Configuration and Internal Block Diagram

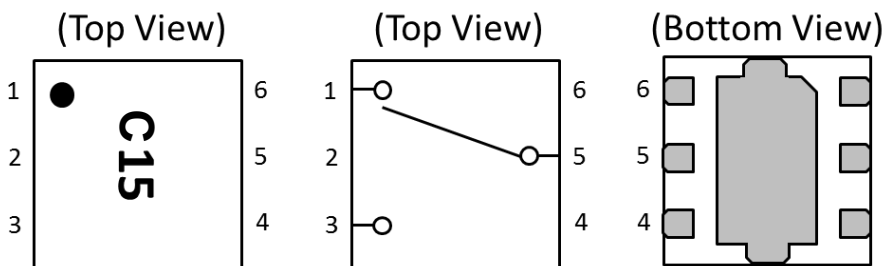

Pin No.	Pin Name
1	RF1
2	GND
3	RF2
4	VC2
5	RFC
6	VC1

Remark Exposed pad : GND

Ordering Information

Part Number	Order Number	Package	Marking	Supplying Form
CG2415X3-C2	CG2415X3-C2	6-pin TSON (Pb-Free)	C15	<ul style="list-style-type: none"> • Embossed tape 8 mm wide • Pin 1, 6 face the perforation side of the tape • Qty 10 kpcs/reel

DATA SHEET : CG2415X3

0.5 to 6.0 GHz High Power SPDT Switch

Absolute Maximum Ratings

(T_A = +25°C, unless otherwise specified)

Parameter	Symbol	Rating	Unit
Control Voltage	VC	6.0 ^{Note 1}	V
Input Power	P _{in}	+34.5 ^{Note 2}	dBm
Operating Ambient Temperature	T _A	-45~+85	°C
Storage Temperature	T _{stg}	-55~+150	°C

- Note**
1. $|VC1 - VC2| \leq 6.0V$
 2. $3.0V \leq |VC1 - VC2| \leq 5.0V$

Recommended Operating Range

(T_A = +25°C, unless otherwise specified)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Operating Frequency	f	0.5	-	6.0	GHz
Switch Control Voltage (H)	VC(H)	+1.8	+3.0	+5.3	V
Switch Control Voltage (L)	VC(L)	-0.2	0	+0.2	V

Truth Table

VC1	VC2	RFC-RF1	RFC-RF2
High	Low	ON	OFF
Low	High	OFF	ON

DATA SHEET : CG2415X3

0.5 to 6.0 GHz High Power SPDT Switch

Electrical Characteristics 1

($T_A=+25\text{ }^\circ\text{C}$, $V_C(H)=3.0\text{V}$, $V_C(L)=0\text{V}$, $Z_0=50\ \Omega$, DC Block Capacitance=8pF, unless otherwise specified)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Insertion Loss	L_{INS1}	$f=0.5$ to 2.0GHz ^{Note 1}	---	0.30	0.50	dB
	L_{INS2}	$f=2.0$ to 2.5GHz	---	0.35	0.55	dB
	L_{INS3}	$f=2.5$ to 3.8GHz	---	0.40	0.60	dB
	L_{INS4}	$f=3.8$ to 6.0GHz	---	0.45	0.70	dB
Isolation	$ISL1$	$f=0.5$ to 2.0GHz ^{Note 1}	29	32	---	dB
	$ISL2$	$f=2.0$ to 2.5GHz	29	32	---	dB
	$ISL3$	$f=2.5$ to 3.8GHz	29	32	---	dB
	$ISL4$	$f=3.8$ to 6.0GHz	23	26	---	dB
Return Loss	$RL1$	$f=0.5$ to 2.0GHz ^{Note 1}	15	20	---	dB
	$RL2$	$f=2.0$ to 2.5GHz	15	20	---	dB
	$RL3$	$f=2.5$ to 6.0GHz	10	15	---	dB
0.1dB Loss Compression Input Power ^{Note 2}	$P_{in(0.1dB)}$	$f=0.5$ to 2.0GHz ^{Note 1}	---	+32	---	dBm
		$f=2.0$ to 6.0GHz	---	+31	---	dBm
		$f=0.5$ to 6.0GHz ^{Note 1} $V_C(H)=5.0\text{V}$	---	+35	---	dBm
0.5dB Loss Compression Input Power ^{Note 3}	$P_{in(0.5dB)}$	$f=0.5$ to 2.0GHz ^{Note 1}	---	+34	---	dBm
		$f=2.0$ to 6.0GHz	---	+34	---	dBm
3rd Order Input Intercept Point	IIP_3	$f=2.5\text{GHz}$, 2-tone 1MHz Spacing	---	60	---	dBm
2nd Harmonics	$2f_0$	$f=2.5\text{GHz}$, $P_{in}=+20\text{dBm}$	---	-90	---	dBc
		$f=6.0\text{GHz}$, $P_{in}=+20\text{dBm}$	---	-90	---	dBc
3rd Harmonics	$3f_0$	$f=2.5\text{GHz}$, $P_{in}=+20\text{dBm}$	---	-90	---	dBc
		$f=6.0\text{GHz}$, $P_{in}=+20\text{dBm}$	---	-90	---	dBc

Note 1. DC block capacitance = 56pF at $f=0.5$ to 2.0GHz

Note 2. $P_{in(0.1dB)}$ is the measured input power level when the insertion loss increases 0.1dB more than that of the linear range.

Note 3. $P_{in(0.5dB)}$ is the measured input power level when the insertion loss increases 0.5dB more than that of the linear range.

DATA SHEET : CG2415X3

0.5 to 6.0 GHz High Power SPDT Switch

Electrical Characteristics 2


($T_A=+25\text{ }^\circ\text{C}$, $V_C(H)=3.0\text{V}$, $V_C(L)=0\text{V}$, $Z_0=50\ \Omega$, DC Block Capacitance=8pF, unless otherwise specified)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Error Vector Magnitude	EVM	802.11a, 64QAM, 54Mbps, $P_{in} \leq +25\text{dBm}$	---	0.5	---	%
		802.11g, 64QAM, 54Mbps, $P_{in} \leq +25\text{dBm}$	---	0.5	---	%
		802.11ac, 256QAM, MCS9, 80MHz, $P_{in} \leq +25\text{dBm}$	---	0.5	---	%
Switch Control Current	I_{CONT}	RF none	---	2	10	μA
Switching Speed	T_{SW}	50% CTL to 90/10% RF	---	100	250	ns

DATA SHEET : CG2415X3

0.5 to 6.0 GHz High Power SPDT Switch

Evaluation Circuit

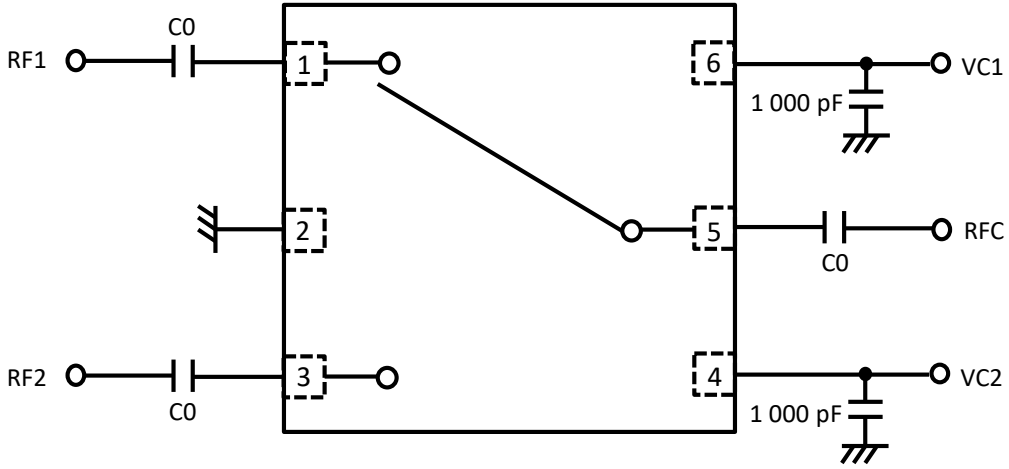


Note C0 : 0.5 to 2.0 GHz 56pF
: 2.0 to 6.0 GHz 8pF

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins. DC Blocking Capacitors are required at all RF Ports.

Package Dimensions

6-pin TSON (Unit : mm)

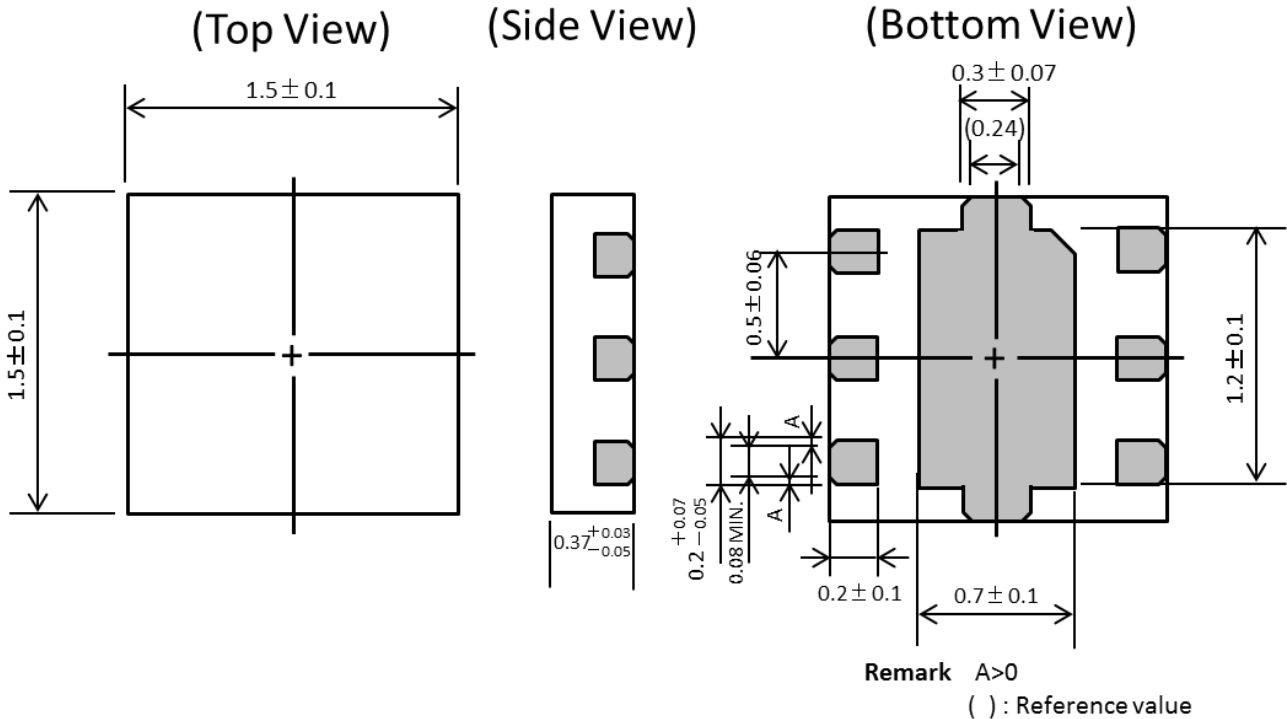


DATA SHEET : CG2415X3



0.5 to 6.0 GHz High Power SPDT Switch

PCB Layout Footprint

6-pin TSON (Unit: mm)

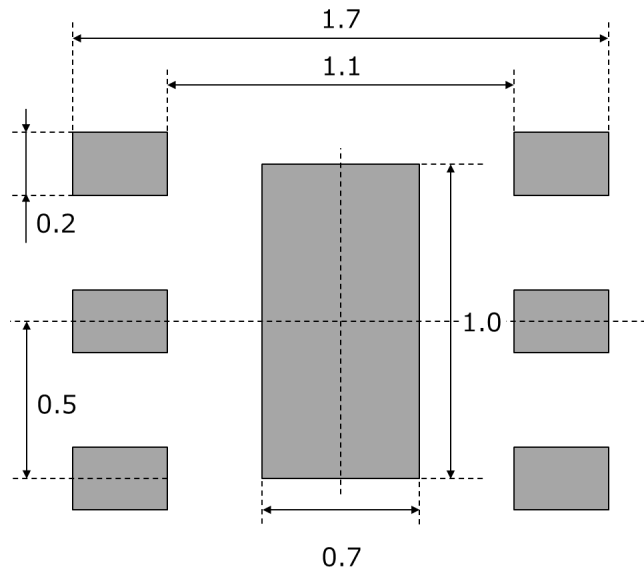

The PCB Layout Footprint in this document is for reference only.

DATA SHEET : CG2415X3

0.5 to 6.0 GHz High Power SPDT Switch

All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice.

- You should not alter, modify, copy, or otherwise misappropriate any CEL product, whether in whole or in part.
- CEL does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of CEL products or technical information described in this document. No license, expressed, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of CEL or others.
- Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. CEL assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- CEL has used reasonable care in preparing the information included in this document, but CEL does not warrant that such information is error free. CEL assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- Although CEL endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions.

Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a CEL product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures

Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.

- Please use CEL products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. CEL assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of CEL.
- Please contact CEL if you have any questions regarding the information contained in this document or CEL products, or if you have any other inquiries.

DATA SHEET : CG2415X3



0.5 to 6.0 GHz High Power SPDT Switch

[Caution in the gallium arsenide (GaAs) product handling]

This product uses gallium arsenide (GaAs) of the toxic substance appointed in laws and ordinances. GaAs vapor and powder are hazardous to human health if inhaled or ingested.

- Do not dispose in fire or break up this product.
- Do not chemically make gas or powder with this product.
- When discard this product, please obey the law of your country.
- Do not lick the product or in any way allow it to enter the mouth.

[CAUTION]

Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

CEL Headquarters • 4590 Patrick Henry Drive • Santa Clara, CA 95054 • Tel: (408) 919-2500 • www.cel.com

For a complete list of sales offices, representatives and distributors,

Please visit our website: www.cel.com/contact

For inquiries email us at support@cel.com

DATA SHEET : CG2415X3



0.5 to 6.0 GHz High Power SPDT Switch

Version	Change to current version	Page(s)
CDS-0064-01 Nov. 2018	Initial datasheet	N/A